

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark  
Office  
(Box PCT)  
Crystal Plaza 2  
Washington, DC 20231  
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 24 February 1998 (24.02.98)	
International application No. PCT/SE97/01102	Applicant's or agent's file reference TP 1192-WO
International filing date (day/month/year) 19 June 1997 (19.06.97)	Priority date (day/month/year) 01 July 1996 (01.07.96)
Applicant LASSON, Rolf	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

28 January 1998 (28.01.98)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was  
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer Aino Metcalfe
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

**THIS PAGE BLANK (USPTO)**

**PCT**

From the INTERNATIONAL BUREAU

**NOTICE INFORMING THE APPLICANT OF THE  
COMMUNICATION OF THE INTERNATIONAL  
APPLICATION TO THE DESIGNATED OFFICES**

(PCT Rule 47.1(c), first sentence)

To:

PERSSON, Eva  
AB Tetra Pak  
Ruben Rausings gata  
S-221 86 Lund  
SUEDE

Date of mailing (day/month/year) 08 January 1998 (08.01.98)		
Applicant's or agent's file reference TP 1192-WO		<b>IMPORTANT NOTICE</b>
International application No. PCT/SE97/01102	International filing date (day/month/year) 19 June 1997 (19.06.97)	Priority date (day/month/year) 01 July 1996 (01.07.96)
Applicant TETRA LAVAL HOLDINGS & FINANCE S.A. et al		

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:  
AU,BR,CA,CN,EP,IL,JP,KP,KR,NO,PL,SK,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:  
AL,AM,AP,AT,AZ,BA,BB,BG,BY,CH,CU,CZ,DE,DK,EA,EE,ES,FI,GB,GE,HU,IS,KE,KG,KZ,LC,LK,  
LR,LS,LT,LU,LV,MD,MG,MK,MN,MW,MX,NZ,OA,PT,RO,RU,SD,SE,SG,SI,TJ,TM,TR,TT,UA,UG,UZ,  
VN  
The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on  
08 January 1998 (08.01.98) under No. WO 98/00350

**REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)**

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

**REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))**

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

<p style="text-align: center;">The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p>	<p>Authorized officer  J. Zahra</p>
Facsimile No. (41-22) 740.14.35	Telephone No. (41-22) 338.83.38

**THIS PAGE BLANK (USPTO)**

# PATENT COOPERATION TREATY

## PCT

### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference TP 1192	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/SE 97/01102	International filing date ( <i>day/month/year</i> ) 19.06.1997	Priority date ( <i>day/month/year</i> ) 01.07.1996
International Patent Classification (IPC) or national classification and IPC <sub>6</sub> B 65 D 65/40, B 65 D 5/42		
Applicant Tetra Laval Holdings & Finance SA et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 3 sheets, including this cover sheet.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of \_\_\_\_\_ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand  28.01.1998	Date of completion of this report  09.10.1998
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 3088 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer  Jack Hedlund Telephone No. 08-782 25 00

**THIS PAGE BLANK (US**

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE 97/01102

## I. Basis of the report

1. This report has been drawn on the basis of *(Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.)*:

- ☒ the international application as originally filed.
- ☐ the description, pages \_\_\_\_\_, as originally filed,  
 pages \_\_\_\_\_, filed with the demand,  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_,  
 pages \_\_\_\_\_, filed with the letter of \_\_\_\_\_.
- ☐ the claims, Nos. \_\_\_\_\_, as originally filed,  
 Nos. \_\_\_\_\_, as amended under Article 19,  
 Nos. \_\_\_\_\_, filed with the demand,  
 Nos. \_\_\_\_\_, filed with the letter of \_\_\_\_\_,  
 Nos. \_\_\_\_\_, filed with the letter of \_\_\_\_\_.
- ☐ the drawings, sheets/fig \_\_\_\_\_, as originally filed,  
 sheets/fig \_\_\_\_\_, filed with the demand  
 sheets/fig \_\_\_\_\_, filed with the letter of \_\_\_\_\_,  
 sheets/fig \_\_\_\_\_, filed with the letter of \_\_\_\_\_.

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages \_\_\_\_\_
- ☐ the claims, Nos. \_\_\_\_\_
- ☐ the drawings, sheets/fig \_\_\_\_\_

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the supplemental Box (Rule 70.2(c)).

4. Additional observations, if necessary:

THIS PAGE BLANK (USPTO)



## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE 97/01102

**V. Resoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims	<u>2-9, 11-12</u>	YES
	Claims	<u>1, 10, 13</u>	NO
Inventive step (IS)	Claims	<u></u>	YES
	Claims	<u>2-9, 11-12</u>	NO
Industrial applicability (IA)	Claims	<u>1-13</u>	YES
	Claims	<u></u>	NO

**2. Citations and explanations**

The claimed invention relates to crease-lined packaging laminate comprising at least two layers.

The object of the invention is to provide a crease-lined packaging material which makes for more distinct and well-formed fold edges and thereby packaging containers having better formed edge lines and corners.

This is achieved by a laminate in which the adhesive bonding strength between the layers is reduced or eliminated along the crease lines.

However, EP 0076979 A1 which is cited in the search report, relates to a packaging container prepared from a crease-lined laminate comprising at least two layers. The laminate is produced by a method in which the layers are caused to adhere to one another by the supply of heat only in the regions outside the regions of the crease lines. Thus, the adhesive bonding strength along the crease lines is reduced. See especially abstract and figure 7.

Therefore, the invention claimed in claims 1, 10 and 13 can not be considered to fulfil the requirement of novelty. The rest of the claims, namely 2 - 9 and 11 - 12 can not be considered to involve an inventive step as the subject matter in these claims differs from what is disclosed in the cited document only in respect of details, which are considered obvious to a person skilled in the art.

EP 0480249 A1, also cited in the search report, relates to a method of obtaining bend lines on packaging material. This document only discloses the general state of the art, which is not considered to be of particular relevance.

**THIS PAGE BLANK (USP 12)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65D 65/40, 5/42</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/00350</b> (43) International Publication Date: <b>8 January 1998 (08.01.98)</b>
--	-----------	--

(21) International Application Number: **PCT/SE97/01102**(22) International Filing Date: **19 June 1997 (19.06.97)**(30) Priority Data:  
**9602607-5**      **1 July 1996 (01.07.96)**      **SE**(71) Applicant (for all designated States except US): **TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; 70, avenue Général-Guisan, CH-1009 Pully (CH).**

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LASSON, Rolf [SE/SE]; Rudeboksvägen 307, S-226 55 Lund (SE).**(74) Agent: **PERSSON, Eva; AB Tetra Pak, Ruben Rausingsgata, S-221 86 Lund (SE).**(81) Designated States: **AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).****Published***With international search report.*(54) Title: **A CREASE-LINED PACKAGING LAMINATE, A METHOD OF PROVIDING A PACKAGING LAMINATE WITH CREASE LINES, AND PACKAGING CONTAINERS PRODUCED FROM THE LAMINATE**

## (57) Abstract

The disclosure relates to a crease-lined packaging laminate (20) which makes for more distinct and well-formed fold edges and thereby packaging containers with an attractive appearance and good configurational stability and handling stability, as well as a simple method of providing a packaging laminate with crease lines, which makes for more rational, and more economical changing of crease line patterns without the employment of expensive creasing tools. A packaging laminate (20) comprising at least two layers (11, 12) which both contribute to the total rigidity of the packaging laminate is provided with fold indications in that the adhesion between the two layers is reduced or eliminated along the linear regions along which the packaging laminate is to be folded. Since both of the layers can be deformed more independently of one another along the linear adhesion-reduced fold regions (14), the total flexural resistance of the packaging laminate is less in these regions than in the rest of the packaging laminate. The adhesive bonding strength between the two layers (11, 12) may, for example, be reduced by applying an adhesion-counteracting agent on one or both of the layers within the linear crease line regions, or by applying an adhesion-promoting agent in the regions outside these crease line regions. In particular, the adhesion may be reduced by bringing the two layers to surface fusion with one another by the supply of heat to regions outside the crease lines. For example, the surfaces in the regions outside the crease lines may be darkened or blackened in order to absorb more heat than the relatively lighter crease line regions.



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

300 Rec'd PCT/PTO 23 DEC 1998

A CREASE-LINED PACKAGING LAMINATE, A METHOD OF PROVIDING A PACKAGING LAMINATE WITH CREASE LINES, AND PACKAGING CONTAINERS PRODUCED FROM THE LAMINATE

5 TECHNICAL FIELD

The present invention relates to a crease-lined packaging laminate comprising at least two layers. The present invention also relates to a method of producing the crease-lined packaging laminate, and also to packaging containers produced from the crease-lined packaging laminate by fold forming.

BACKGROUND ART

Use has long been made in the packaging industry of packages of the single-use type for packing and transporting liquid foods. Such so-called single-use disposable packages are often manufactured from a flexible material which, by fold forming and sealing, is converted into filled, sealed packaging containers of the desired shape. A very large group of these disposable packages is produced from a laminated packaging material comprising a core layer of paper or paperboard and outer, liquid-tight coatings of plastic on both sides of the core layer. The packaging laminate may also include additional layers of plastic and/or metal in order to impart to the packaging containers superior barrier properties against, for example, gases and light.

While the packaging material is in the unfolded, planar state, it is often provided with lines of weakness, so-called crease lines, for facilitating folding with the purpose of facilitating the conversion of the packaging material into packaging containers of the desired configuration.

Conventionally, such crease lines are realised by placing the packaging material intended for creasing between moving male and female parts of a creasing tool which, by pressing, deforms and impresses the desired weakening pattern in the packaging material. The deformation takes place in that the packaging material is, along the intended fold lines, pressed into grooves in the female part of the tool by means of linear projections or ridges on the surface of the male tool. A packaging material with crease lines produced in this manner displays a positive and a negative side, i.e. the creasing tool gives rise to an elevated linear (ridge-like) deformation of the

one, positive side of the packaging material, and a corresponding linear depression on the other, negative side of the packaging material.

5 A pattern of such crease lines may be obtained on processing of planar material sheets by means of press plates or by so-called rotation creasing, i.e. creasing of a continuous web by means of two cooperating rotary rollers with complementary channels or grooves and ridges or beads respectively.

10 The conventional method of realising crease lines makes for a simple folding process with distinct folding lines, but changes in the process entail high costs and extensive work, since each specific crease line pattern and each specific packaging material, with specific thickness and quality, requires its unique creasing tool with adapted widths and depths in the grooves and ridges.

15 A further drawback inherent in the conventionally crease-lined packaging material is that the folded side edges of the packaging container tend to have a rounded, blunt appearance. On fold forming along the crease line, the raised linear deformation of the packaging material is compressed on the positive side of the packaging material, on the inside of the packaging container, forming ridges or accumulations of packaging material. Since the  
20 relatively large accumulation of compressed packaging material is located centrally in the fold, and because of the relative resilience of the fibres gathered in the material accumulation, tensions and forces arise in the fold edge because of the material's propensity to "spring back" to its original planar form. As a result of these resilient return forces, the fold edges of the  
25 packaging container will become readily gently rounded with a tendency to be flattened on external loading, for example from the grip of a hand, which gives the package an impression of poor grip rigidity.

A known method of realising better defined folds in a packaging container is described in Swedish Patent Application carrying publication  
30 number 467302. By removing the above mentioned raised linear deformation on the positive side of the packaging material, by mechanical processing such as milling, subsequent folding of the packaging material is facilitated at the same time as the material is weakened along the crease line and the return resilience forces in the fold region are reduced. However, this method  
35 suffers from the drawbacks that the surface of the packaging material on the inside of the packaging container is locally destroyed in the crease line

region, and that the strength of the fold is reduced as a result of the removal of material. Moreover, dust and/or waste material are created which need to be taken care of.

## 5 OBJECTS OF THE INVENTION

One object of the present invention is therefore to realise a crease-lined packaging material of the type described by way of introduction, without consequential problems of the type intimately related to the prior art techniques and methods.

10 Another object of the present invention is to realise a crease-lined packaging material of the type described by way of introduction which makes for sharper, better defined folds of the packaging material and thus better formed edge lines and corners in a packaging container.

15 Yet a further object of the present invention is to provide a method for realising crease lines in a packaging material of the type described by way of introduction, obviating complex, conventional creasing processes using relatively expensive creasing tools, and to make for simpler, more rational and more economical changes of crease line patterns on switching between different package sizes and packaging material qualities.

20 Still a further object of the present invention is to realise a better formed packaging container possessing improved configurational stability and gripping stability on the action of external forces.

## SOLUTION

25 These and other objects are attained by means of a laminated packaging material possessing the characterizing features as set forth in appended Claim 1. Preferred embodiments of the packaging material according to the present invention are apparent from appended subclaims 2 to 6.

30 The method according to the present invention has the characterizing features as set forth in independent Claims 7, 8 and 10, respectively. Variations and modifications of the method according to the invention have further been given the characterizing features as set forth in appended subclaims 9 and 11 to 13, respectively.

35 Furthermore, the present invention provides a grip stable packaging container with well-defined side edges which is produced by fold forming of

a packaging laminate according to the present invention.

By selectively reducing or eliminating the bonding adhesive strength between the layers in a packaging laminate which comprises at least two such layers, along the linear regions along which the packaging laminate is to be folded, relatively complex, conventional creasing processes using expensive creasing tools can be obviated, at the same time as the fold edges of the packaging container will be more distinct and the packaging container will thereby be given attractive appearance with good handling stability and durability.

#### BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

The above-outlined aspects of the present invention will now be described in greater detail hereinbelow, with particular reference to the accompanying Drawings, in which:

Figs. 1a and 1b schematically illustrate a cross section of a packaging container of a conventionally laminated packaging material and a laminated packaging material according to the present invention, respectively; and

Fig. 2 schematically illustrates one example of a crease-lined packaging material according to one embodiment of the present invention.

While the present invention will be described in greater detail with reference to specific embodiments shown on the Drawings, it will be obvious to a person skilled in the art that different modifications and variations may be made without departing from the inventive concept as this is defined in the appended Claims.

#### DESCRIPTION OF PREFERRED EMBODIMENT

Fig. 1a thus shows a cross section of a packaging container of a conventionally creased packaging laminate 10. Examples of such conventional packaging containers are Tetra Brik® or Tetra Rex®. The conventional packaging laminate 10 comprises a core layer or carrier layer 11 of paper or paperboard and a layer 12 disposed on the inside of the core layer.

The layer 12 is normally a gas or light barrier layer of, for example, an aluminium foil (Alifoil) or a metalised plastic film, such as aluminised, oriented polypropylene or aluminised, oriented polyester. The concept "metalised" implies that a thin layer of metal has been deposited on a surface



by means of known deposition techniques such as, for example, the CVPD technique (Chemical Vapour Plasma Deposition), and encompasses metal oxides such as, for example, silicon oxide ( $\text{SiO}_x$ , where  $x$  is between 1.5 and 2.2). The layer 12 may also consist of a so-called greaseproof layer of the glassine type or greaseproof paper.

In conventional creasing, the total flexural resistance of the packaging laminate is reduced along the crease zones by linear deformation of the packaging laminate. The packaging material 10 thus has raised linear deformations on the inside of the packaging material, which, during the fold forming operation, are compressed on the inside of the corners of the fold edges. On fold forming, the inside of the packaging laminate is pressed with these raised linear deformations together in the corners of the folded side edges on the inside of the packaging container. The folded side edge corners will be less distinct, since the compressed packaging material on the inside of the fold corners tends to "spring back" to the uncompressed state.

Fig. 1b shows the same type of packaging container of a packaging laminate 20 comprising the same material layers but with crease lines according to the present invention. The packaging material 20 has been provided with fold indications by reducing, or preferably eliminating the adhesive bonding strength between the core layer 11 and the layer 12 laminated on the inside of the core layer along the fold indications.

In a laminate of two layers in which both layers adhere to one another in blanket fashion, the rigidity of the core layer 11 affects the folding process in the core layer 12, and vice versa. During the folding process, the one material layer is influenced by resistive forces and tension which arise because of the fact that the material rigidity of the second layer strives to accompany the first layer in the folding operation. When adhesion is reduced or eliminated between the two layers in the fold regions, the two layers need not, on the other hand, accompany one another in the folding, and therefore do not affect each other as much during the folding process.

Since the layers 11 and 12 can be deformed more independently of one another along the linear adhesion-reducing fold indications, they have no influence on each other's flexural rigidity during the folding process. The layer 12 thus makes no contribution in the total rigidity of the laminate by being laminated to the layer 11, and vice versa, whereby the total flexural resistance along the linear fold regions will be less than in the rest of the

packaging material.

Since the total flexural resistance is lower in the linear fold indication regions, within which the adhesive bonding strength is reduced or eliminated, the packaging material becomes more easily folded, i.e. deformable along these regions than in other regions of the packaging material. In regions where the layers are adhesion-reduced or adhesion-free, the flexural resistance thus consists substantially only of the flexural resistance of the more rigid of the layers. The total flexural resistance in the above-mentioned linear fold indication regions is estimated in the packaging laminate 20 to be approximately as great as the total flexural resistance in a conventional crease line in the same packaging laminate. The linear regions with reduced or eliminated adhesion thus constitute distinct fold indications in the packaging material without the packaging material having been deformed in any way beforehand.

Such fold indications will be more distinct and easily folded if both layers are relatively rigid, i.e. contribute to the total rigidity and flexural resistance of the packaging laminate, as is, for instance, the case when a core layer and a layer comprising an aluminium foil are laminated.

Another packaging laminate according to the invention may be crease-processed both by conventional mechanical deforming and by adhesion-reduction or adhesion-elimination between the layers in the fold regions. Such a "double creased" packaging laminate achieves better defined folds and corners in the fold-formed packaging container and lower flexural resistance as compared with exclusively conventional mechanical deformation.

The linear weakening regions according to the present invention should be sufficiently wide to give the requisite weakening in the packaging material, i.e. to facilitate folding, at the same time as they must be sufficiently narrow to give a sharp, straight and well-defined side edge on fold forming. The width of the crease line thus depends on the material properties and thicknesses of the layers included in the packaging laminate, and hence varies for different packaging laminates. In a conventional packaging laminate with a core layer of paper or paperboard and an aluminium foil, the width of the crease line is preferably between approximately 1 and 3 mm.

The reduction or elimination of the adhesive bonding strength between the two layers 11 and 12 as disclosed above may be realised in

different ways. According to one method, an adhesion-counteracting agent is applied on one or both of the layers within the linear fold regions. The term adhesion-counteracting agent is taken to signify an agent which possesses adhesion-counteracting properties vis-à-vis one or both of the layers between  
5 which the adhesion is to be reduced. Such agents are known to persons skilled in the art.

According to another method, an adhesion-promoting agent is instead applied to one or both of the layers in the regions outside the above-mentioned linear regions, but not within them. Such an adhesion-promoting  
10 agent thus has good adhesive properties in respect of both of the layers which are to be laminated. Adhesion-promoting agents and glues of all types are conceivable, and also compositions which harden or cure with the aid of heat (IR-), UV- or EB (Electron Beam) radiation. Adhesion is achieved in that the adhesion-promoting agent is applied to one of both of the layers which  
15 are to be laminated to one another, that both of the layers are laid together and are thereafter cured with the aid of heat, UV- or EB-radiation respectively. For such radiation curing to function, the materials involved must be adapted to each respective type of radiation and, in the latter two cases, the layer placed most proximal the source of radiation must be  
20 permeable for the radiation. Thus, a UV curing composition can cure after the layers intended for lamination have been laid together only if the layer disposed most proximal the radiation is permeable for UV light, such as, for example, a transparent plastic layer.

One special method of laminating two layers to one another is based  
25 on the concept of bringing the two layers to surface fusion with one another by the supply of heat within the regions outside the crease lines. This presupposes that the layers are thermosealable or are provided with thermosealable outer layers. One such thermosealable layer is, for example, polyethylene. Higher adhesion bonding strength between the two layers in  
30 the regions outside the linear fold regions is achieved by selectively treating the surface of one or both of the layers which are to be laminated to one another such that the regions outside the above-mentioned linear fold regions absorb sufficient heat for surface fusion, and that the surfaces within the linear fold regions absorb an insufficient quantity of heat for surface  
35 fusion. For example, the surfaces in the regions outside the linear fold regions (Fig. 2; (15)) are darkened or blackened in order to absorb more heat

on IR-radiation than the relatively lighter surfaces in the fold regions (16).

The selective treatment of the layers may take place with the aid of known printing techniques. Both the adhesion-counteracting and the adhesion-promoting agents, like the dark or black colour, may be applied using printing rollers. Fig. 2 shows an example of a conventional crease line pattern which has been darkened or blackened on one layer in the regions outside the linear fold regions (15).

Under the action of external forces, such as, for example, from a gripping hand, on a folded side edge according to the invention, the external forces are divided up into force components in the plane which is defined by the side walls of the packaging container. Compared with conventional packaging containers which have a less well-defined configuration because of less distinct side edges, and in which such force components tend to deviate from the plane of the side walls, the outward bulging of the side walls of the packaging container which normally occurs under the action of such external forces is reduced and the folded side edge is better capable of withstanding the tendency to weaken and give way. A packaging container produced by fold forming of a packaging material creased by the method according to the present invention is thus more stable to grasp hold of and handle.

As will be have been apparent from the foregoing description, the present invention thus makes it possible to avoid relatively complicated, conventional folding processes using expensive folding tools, and makes for simpler, more rational and more economical changing of crease line patterns on switching between different package sizes and packaging material qualities, at the same time as the folded side edges in packaging containers produced from the packaging laminate will be more distinct and, as a result, the packaging container according to the present invention is given an attractive appearance with good handling stability and handling durability.

## WHAT IS CLAIMED IS:

1. A crease-lined packaging laminate (20) comprising at least two layers (11, 12), characterized in that the adhesive bonding strength between said at least two layers is reduced or eliminated along the crease lines of the packaging laminate.  
5
2. The packaging laminate as claimed in Claim 1, characterized in that one of said layers (11, 12) is locally treated along the crease lines in order to counteract adhesion to the adjacent layer.  
10
3. The packaging laminate as claimed in Claim 2, characterized in that an adhesion-counteracting agent is applied between said layers (11, 12) along the crease lines.  
15
4. The packaging laminate as claimed in Claim 3, characterized in that one of said layers consists of paper or paperboard (11).  
20
5. The packaging laminate as claimed in any of the preceding Claims, characterized in that the second layer (12) comprises an aluminium foil.  
25
6. The packaging laminate as claimed in any of the preceding Claims, characterized in that the second layer (12) comprises a paper of greaseproof type.  
30
7. A method of producing a crease-lined packaging laminate (20) as claimed in any of Claims 1 to 6, characterized in that an adhesion-counteracting agent is applied in the regions of the crease lines between said at least two layers (11, 12).  
35
8. A method of producing a crease-lined packaging laminate (20) as claimed in Claim 1 or 2, characterized in that an adhesion-promoting agent is applied in the regions outside the crease lines between said at least two layers (11, 12).  
40
9. The method as claimed in Claim 8, characterized in that the adhesion-

promoting agent is a UV-curing or EB-curing agent; and that curing is effected by UV- or EB-radiation, respectively, after said at least two layers have been laid together.

- 5 10. A method of producing a crease-lined packaging laminate (20) as claimed in any of Claims 1 to 6, characterized in that said at least two layers (11, 12) are caused to adhere to one another by the supply of heat; and that an insufficient quantity of heat for adhesion is supplied to the regions of the crease lines.
- 10 11. The method as claimed in Claim 10, characterized in that the surface of at least one of said layers absorbs heat; and that the same layer in the regions of the crease lines absorbs an insufficient quantity of heat for adhesion.
- 15 12. The method as claimed in Claim 11, characterized in that heat is supplied by means of IR-radiation of blackened or darkened surfaces (15) on at least one of said layers; and that the layer in the region of the crease lines (16) is white or relatively lighter in colour.
- 20 13. Packaging containers produced by fold forming of a crease-lined packaging laminate as claimed in any of Claims 1 to 6.

Fig. 1a


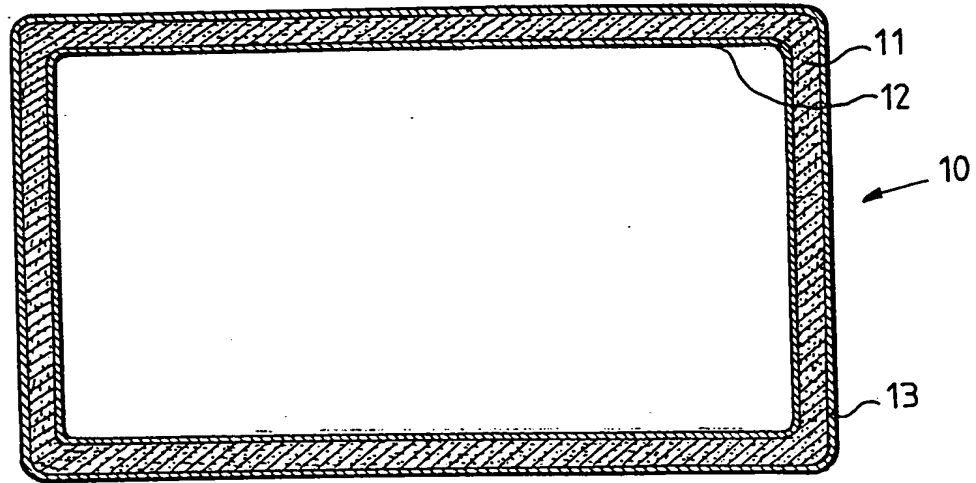



Fig. 1b

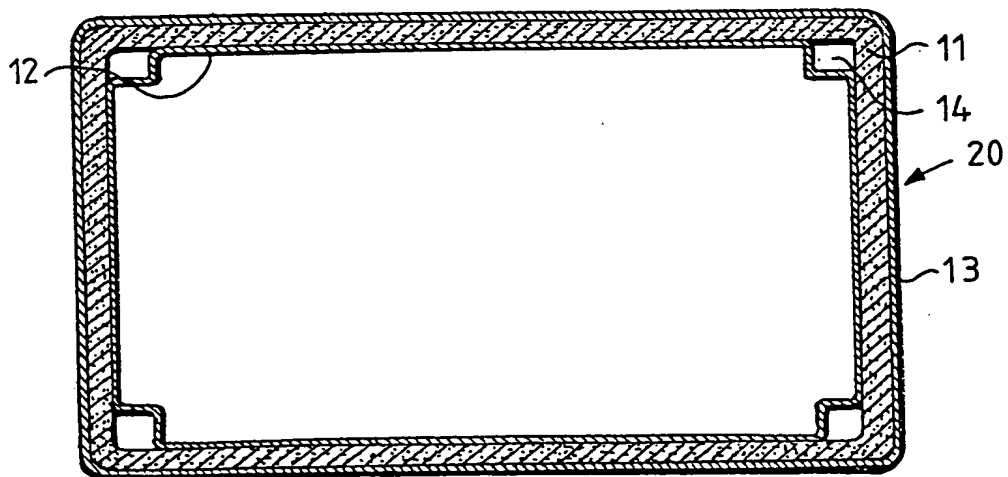

300 Rec 1707/PT0 23 DEC 1998



Fig. 2

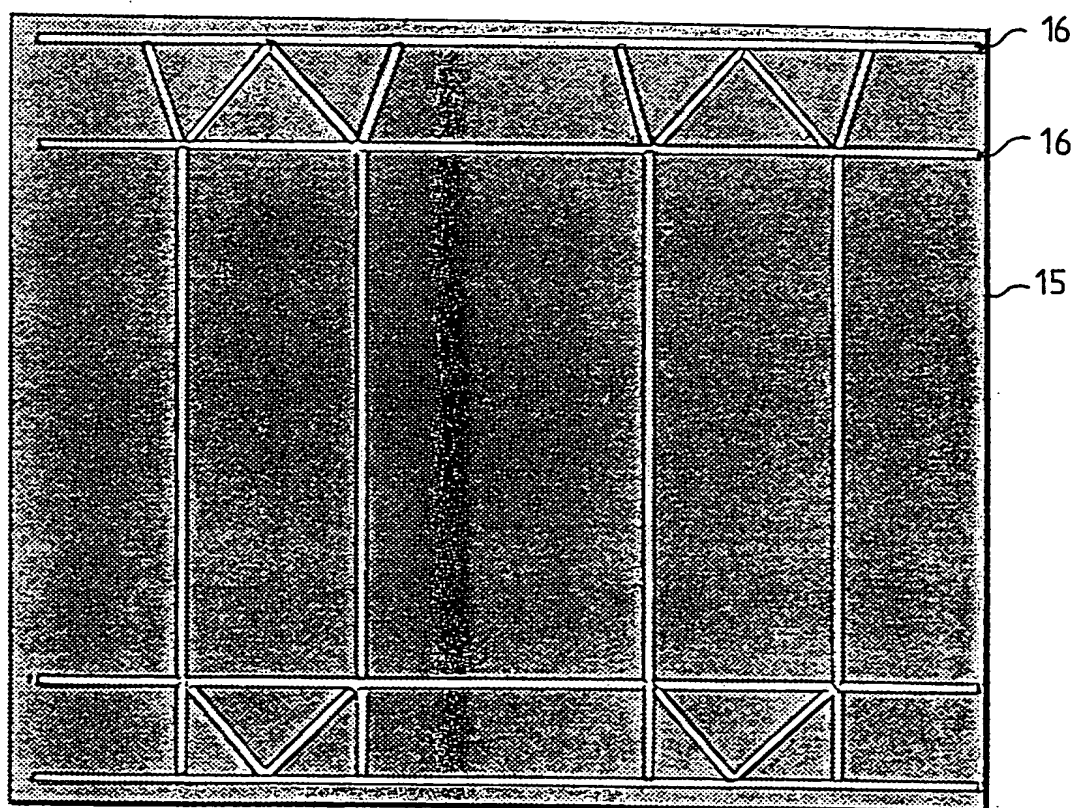

300R●PCT/PTO 23 DEC 1998

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01102

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B65D 65/40, B65D 5/42

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0076979 A1 (TETRA PAK DEVELOPPEMENT SA), 20 April 1983 (20.04.83), figure 7, abstract	1-13
	--	
A	EP 0480249 A1 (TETRA PAK HOLDINGS S.A.), 15 April 1992 (15.04.92)	1-13
	-- -----	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

30 Sept. 1997

Date of mailing of the international search report

16.10.97

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Jack Hedlund  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/SE 97/01102

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0076979 A1	20/04/83	SE 0076979 T3	
		AU 554044 B	07/08/86
		AU 8922982 A	21/04/83
		BR 8205932 A	13/09/83
		CA 1196608 A	12/11/85
		CA 1228009 C	13/10/87
		DE 3140336 A,C	22/09/83
		GB 2112750 A,B	27/07/83
		JP 1681343 C	31/07/92
		JP 3039901 B	17/06/91
		JP 58082839 A	18/05/83
		US 4526314 A	02/07/85
		US 4743326 A	10/05/88
EP 0480249 A1	15/04/92	AT 113530 T	15/11/94
		CS 9103022 A	15/04/92
		CZ 281772 B	15/01/97
		DE 69104949 D,T	09/03/95
		ES 2064023 T	16/01/95
		HU 210239 B	28/03/95
		LT 1823 A	25/08/95
		LT 3758 B	25/03/96
		LV 11136 B	20/08/96
		SE 467302 B,C	29/06/92
		SE 9003192 A	06/04/92
		SU 1838145 A	30/08/93
		US 5207632 A	04/05/93